

Double Leaf EI₂₃₀ / T30 Fire Retardant Acoustic Steel Door

Fire Protection	EI₂₃₀ / T30	tested acc. to EN 1634-1
Smoke Control	S_a, S₂₀₀ / RS	tested acc. to EN 1634-3
Self-Closing	up to C5	tested acc. to EN 1191
Sound Insulation	R_{w,P} 57 dB	tested acc. to EN ISO 10140-2

Optional Audited Additional Functions

- Burglar Protection	RC2/RC3/RC4/RC5	tested acc. to EN 1627
- Bullet Resistance	FB4, FB6, FB7-NS	tested acc. to EN 1522
- Air Tight	up to class 4	tested acc. to EN 1026
- Rain- and Fire-Water Tight	class 6A	tested acc. to EN 1027
- Wind Load Resistance	class C5	tested acc. to EN 12211
- Blast Resistance	up to 5 kPa	tested acc. to EN 13124-1
- Explosion Protection	up to zone 1/21	acc. to EN 1127-1 or ATEX 2014/34/EU
- Stainless Steel		

Range of Dimension

Width from 1375 mm to 4000 mm
Height from 1750 mm to 4000 mm

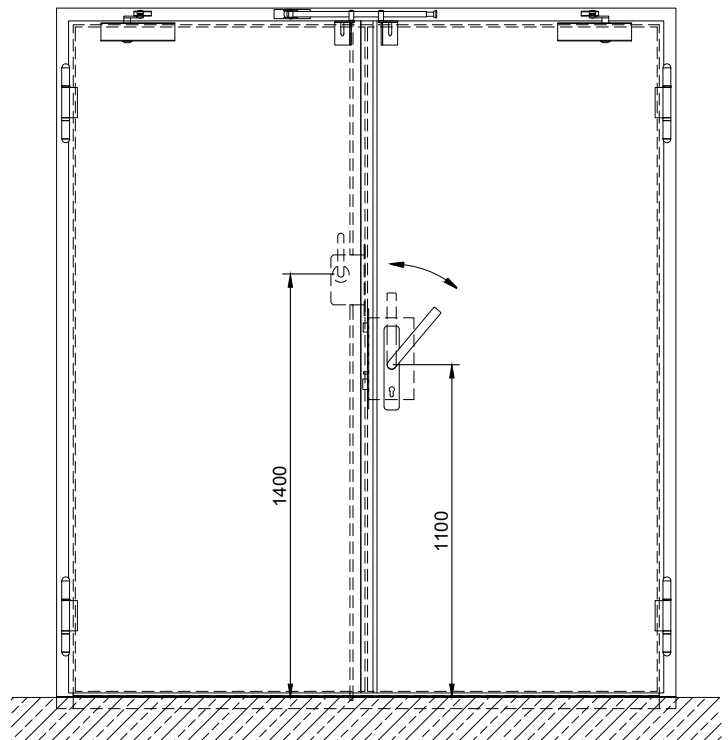
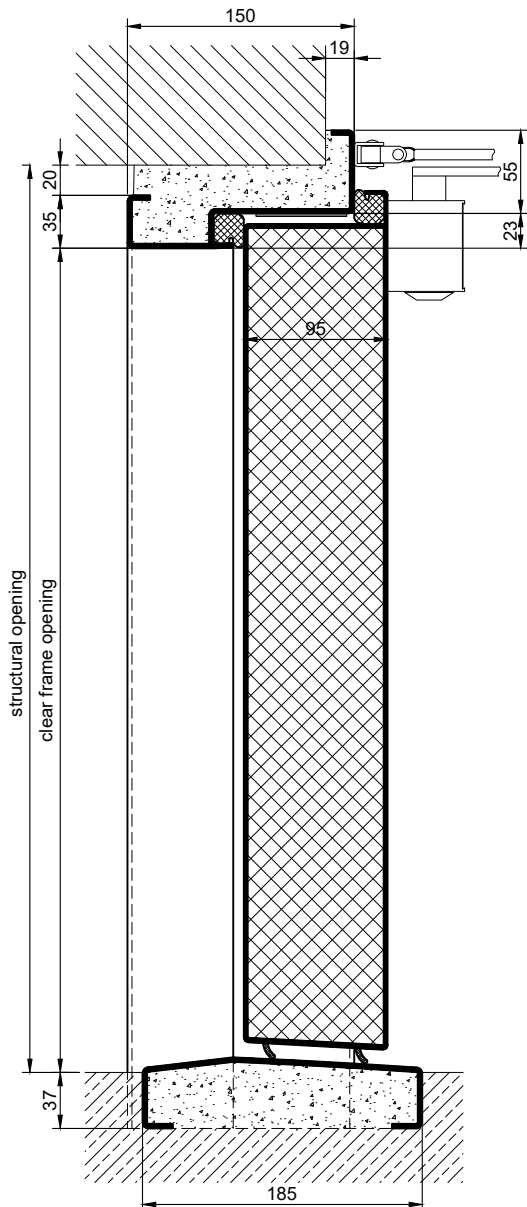

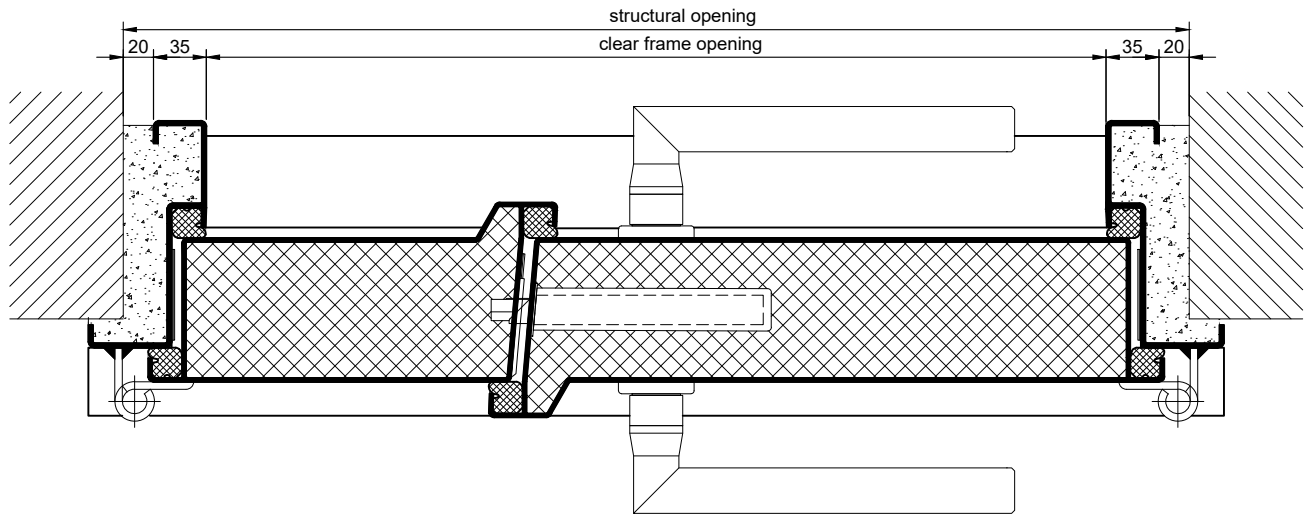
Technical Specification and Tender Text


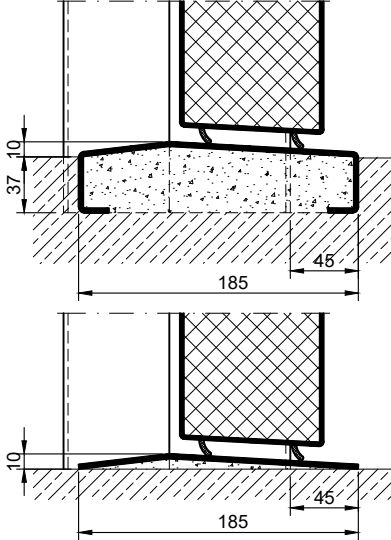
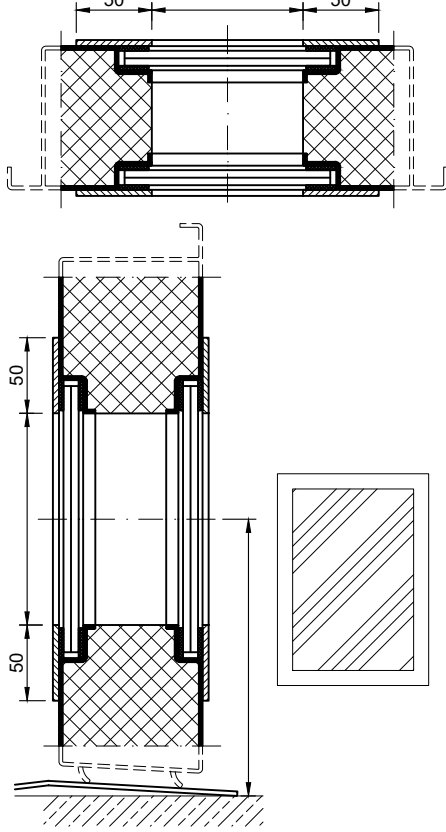
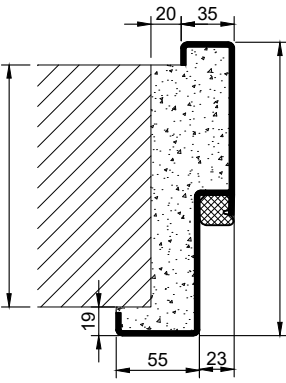
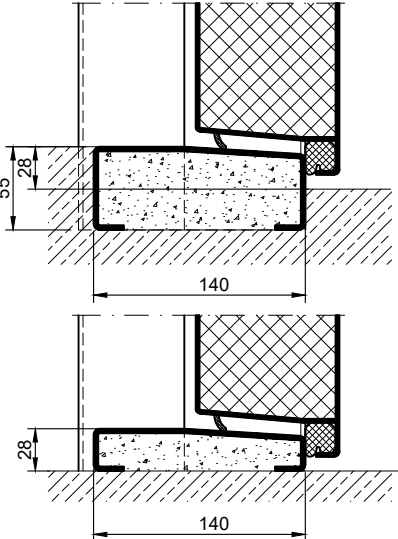
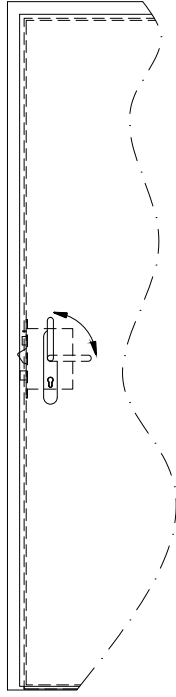

Product:	EI₂₃₀ / T30 double leaf fire retardant smokeproof acoustic steel door brand Buchele tested acc. to EN 1634-1, 1634-3 und EN ISO 10140-2
Door Type:	STB 57-2 / T30 POWER Line
Sound Insulation R_{w,P}	57 dB
Structural Opening: x mm
Door Leaf:	Double-walled, planar 105 mm thick steel door without hinge embossing, three sides rebated with thick rebate and adjustable fixed sealing profile in the rebate. Without bottom stop. Special insulating inserts fully laid-in and glued. Passive leaf with multi-chamber sealing profile in the middle rebate. Securing pin screwed in door leaf rebate. Double tow sealing system.
Threshold:	Threshold profile as barrier-free hump sill. Surface galvanized and welded to the frame.
Frame:	3-sided circumferential rebated corner frame with visible black coated intumescent material in rebate. High-quality multi chamber sealing profile adjustable fixed in the three-sided groove.
Hinges:	Three-part, height adjustable construction hinges with hinge pin retention and ball bearing spacer ring for smooth door movement.
Door Closer:	2 pieces door closer system with standard arm acc. to EN 1154 silver coloured mounted on hinge side. Door coordinator and 2 pieces of 30 mm high brackets with plastic roller.

Fitting:	<p>Active leaf with heavy-duty worm clamping locking device with solid locking worm, spring-suspended lock latch and automatic maloperation interlock system. Lock prepared for installation of a profile cylinder, provided by customer. Reinforced clamping lever pair, ergonomically shaped, fixed pivoted on squared long platers, visible screwed to the door leaf. Surface stainless steel with black lever handle area.</p> <p>Passive leaf with an automatically working 2-point-locking-system placed on door leaf. Half door handle set in acc. to EN 1906 fixed pivoted synthetic material black in U-shape with rounded short-plate.</p>								
Surface:	Door leaf and frame galvanized und primed with 2K-PUR primer (Very High Solid) similar RAL 7035.								
Installation:	<table><tr><td>masonry</td><td>≥ 115 mm</td></tr><tr><td>concrete</td><td>≥ 100 mm</td></tr><tr><td>areated concrete</td><td>≥ 200 mm</td></tr><tr><td>mounting wall F60</td><td>≥ 125 mm</td></tr></table>	masonry	≥ 115 mm	concrete	≥ 100 mm	areated concrete	≥ 200 mm	mounting wall F60	≥ 125 mm
masonry	≥ 115 mm								
concrete	≥ 100 mm								
areated concrete	≥ 200 mm								
mounting wall F60	≥ 125 mm								

Supplementary Equipment

Glazing:	<p>F30 fire-protective double glazing two-sided fixed with profiled and visible screwed steel glazing bars. Minimum border 125 mm on side and top, base 340 mm. Sound Insulation $R_{w,P}$ max. 50dB</p>
Stainless Steel:	<p>Material 1.4301 (V2A) or 1.4404 (V4A), Surface mill finish or brushed.</p>
BUCHELE DELUXE:	<p>The exclusive surface coating.</p>
Panic:	<p>Worm clamping locking device with integrated emergency release function. (The locked and fastened door leaf locking can be unlocked and opened with only two movements without using the locking cylinder.)</p>



Frames	Thresholds	
<p><u>corner frame</u></p> 	<p><u>hump sill</u></p> 	<p><u>glazing</u></p> 
<p><u>encasing frame</u></p> 	<p><u>half sill</u></p> 	<p><u>Buchele-wedge-latch-lock</u></p> 
<p><u>block frame</u></p> 	<p><u>full sill</u></p> 