

Double Leaf PLANE Line FB4-NS Bullet Retardant Security Door

Bullet Resistance **FB 4 NS** **tested acc. to EN 1522**

Optional Audited Additional Functions

- Sound Insulation	up to R_{w,P} 54dB	tested acc. to EN ISO 10140-2
- Burglar Protection	RC2/ RC3/ RC4/ RC5	tested acc. to EN 1627
- Air Tight	up to class 4	tested acc. to EN 1026
- Rain- and Fire-Water Tight	class 6A	tested acc. to EN 1027
- Wind load Resistance	up to class C5	tested acc. to EN 12211
- Blast Resistance	up to 20 kPa	tested acc. to EN 13124-1
- Explosion Protection	up to zone 1/21	acc. to EN 1127-1 or ATEX 2014/34/EU
- Stainless Steel		

Range of Dimension

Width from 1000 mm to 3000 mm
Height from 500 mm to 3000 mm

Technical Specification and Tender Text

Product:	PL2 double leaf bullet retardant security door brand Buchele tested acc. to EN 1522
Door Type:	PLANE Line PL 2 BASIC
Bullet Resistance:	FB 4 NS
Structural Opening: x mm
Door Leaf:	Double-walled, planar 70 mm thick steel door leaf without hinge embossing, three sides rebated with thick rebate. Without bottom stop. Special insulating inserts fully laid-in and glued. Passive leaf with multi-chamber sealing profile in the middle rebate. Securing pin screwed in door leaf rebate.
Threshold:	Floor bracket as separation sill. Surface galvanized and welded to the frame.
Frame:	3-sided circumferential rebated corner frame with high-quality multi chamber sealing profile adjustable fixed in the three-sided rebate.
Hinges:	Three-part, height adjustable construction hinges with hinge pin retention and ball bearing spacer ring for smooth door movement.
Fitting:	Active leaf with 2-point security mortise lock with latch lever function acc. to EN 12209 (prepared for installation of a profile cylinder lock, provided by customer). Door handle set in acc. to EN 1906 fixed pivoted synthetic material black in U-shape with rounded long-plate. Passive leaf with concealed shoot bolt lock.
Surface:	Door leaf and frame galvanized und primed with 2K-PUR primer (Very High Solid) similar RAL 7035.

Alternative: PLANE Line PL 2 PREMIUM with flush mounted optics

Frame: 3-sided circumferential rebated PLANE Line special corner frame for flush mounted optics on hinge side.
With high-quality multi-chamber sealing profile adjustable fixed in the three-sided groove.

Hinges: Object hinges type VB-3D 160 adjustable in three dimensions.
Fixture element with slide bearings inside for smooth door movement.

Alternative: PLANE Line PL 3 SUPERIOR with flush mounted optics

Frame: 3-sided circumferential rebated PLANE Line special corner frame for flush mounted optics on hinge side.
With high-quality multi-chamber sealing profile adjustable fixed in the three-sided groove.

Hinges: Concealed hinge system adjustable in three dimensions.





Supplementary Equipment

Glazing: BR4 single or insulating glazing fixed with profiled steel glazing bars.
Minimum border 125 mm on side and top, base 300 mm.

Stainless Steel: Material 1.4301 (V2A) or 1.4404 (V4A),
Surface mill finish or brushed.

BUCHELE DELUXE: The exclusive surface coating.


BASIC - Version

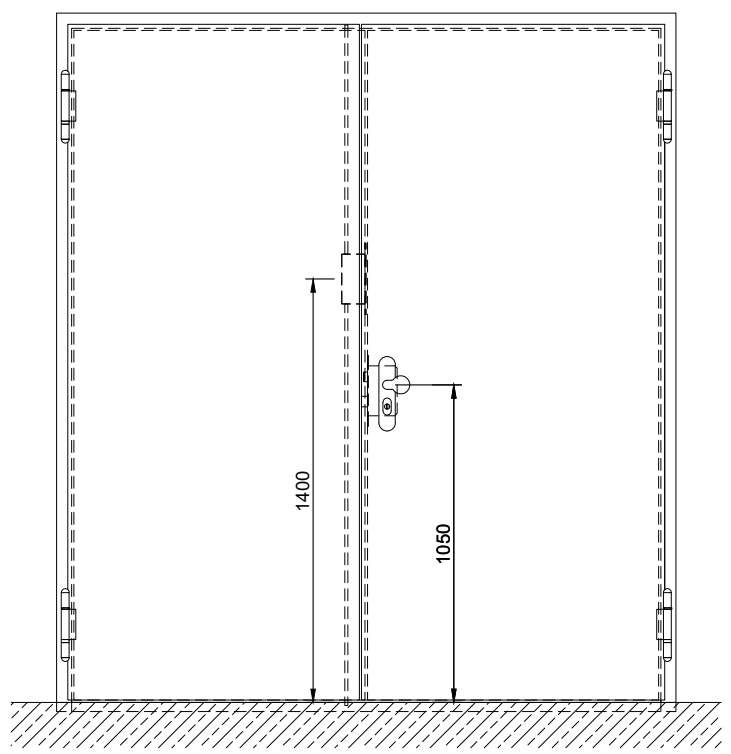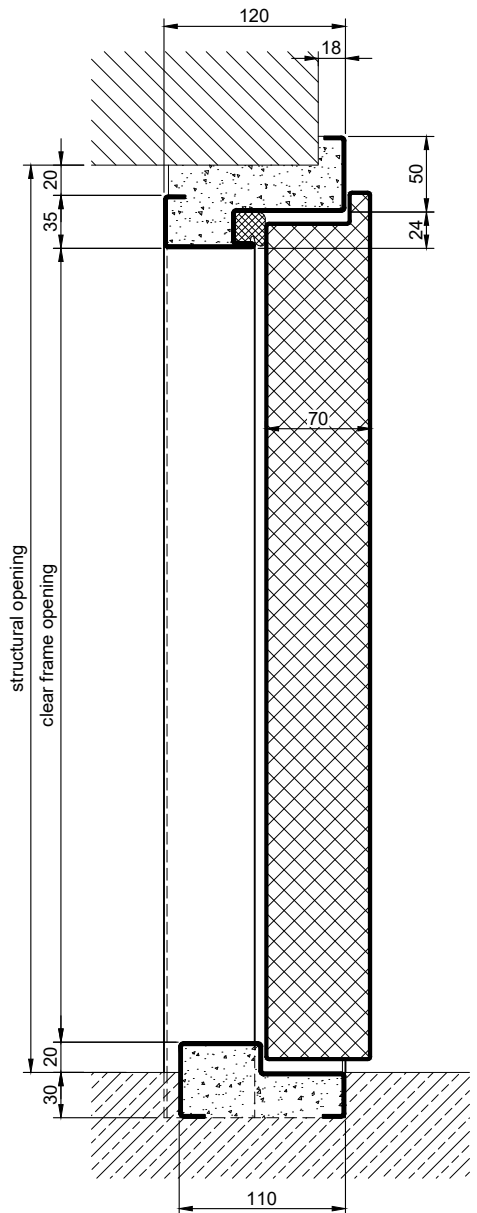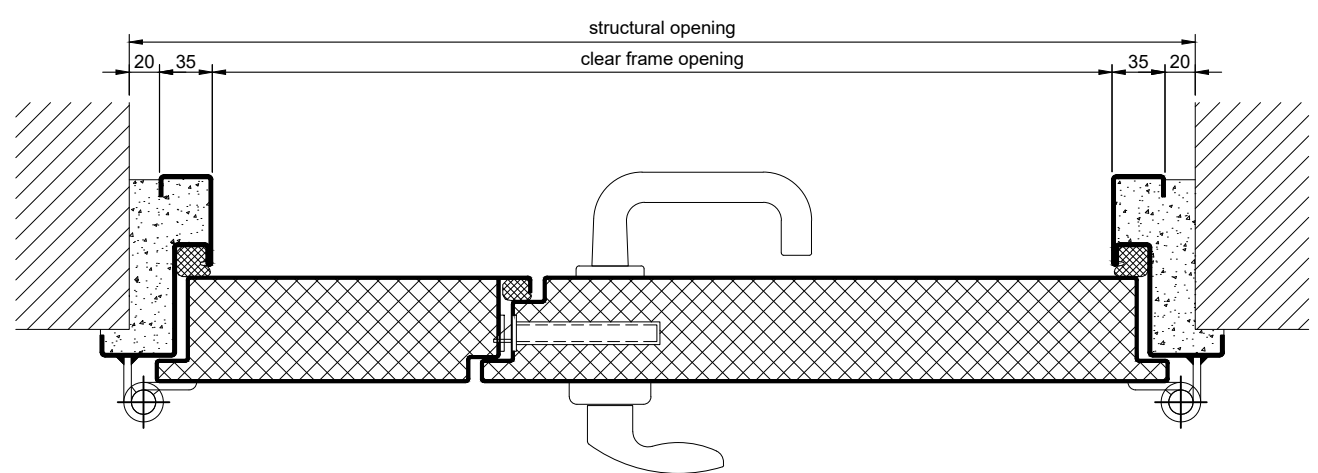


3.11.1_PLANE LINE PL 2_FB4_EN

PREMIUM - Version

object hinges VB-3D

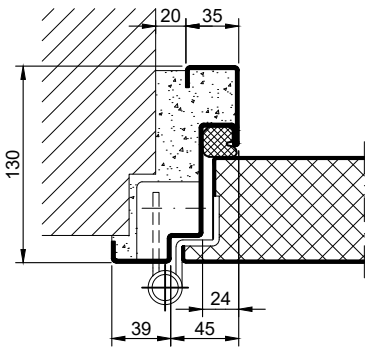


construction hinges




SUPERIOR - Version

concealed hinges

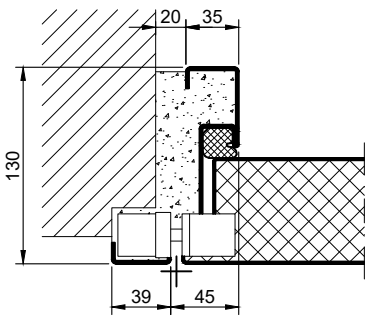

Options

glazing

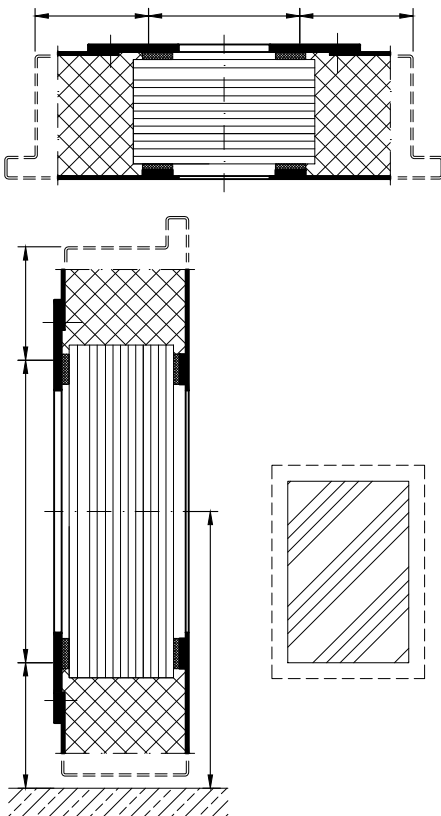

3.11.1 PLANE LINE PL 2 FB4_EN

Frames BASIC	Frames PREMIUM/SUPERIOR	Variants (illustration BASIC)
<p>corner frame</p>	<p>corner frame</p>	<p>corner frame with additional frame</p>
<p>encasing frame</p>	<p>encasing frame</p>	<p>encasing frame with counter frame</p>
<p>block frame</p>	<p>block frame</p>	<p>juttet block frame</p>
<p>corner frame with counter frame</p>	<p>corner frame with counter frame</p>	<p>corner frame at support / pillar</p>
<p>profile block frame</p>	<p>profile block frame</p>	<p>pre-wall frame</p>

3.1.1.1. PLANE LINE PL 2 FB4_EN

technical modifications reserved - edition 06/2024

Thresholds

<p>separation sill</p> <p><i>information:</i> With this version there is NO bullet resistance in the threshold area!</p>	<p>drop seal</p> <p><i>information:</i> With this version there is NO bullet resistance in the threshold area!</p>	
<p>stop sill with seal</p>	<p>stop sill without seal</p>	<p>stop sill with drop seal</p>
		<p>full sill</p>

3.11.1_PLANE LINE PL 2_FB4_EN

technical modifications reserved - edition 06/2024